

Colorbond® Steel Roofing and Siding Panel

Description

A 28-gauge AM® substrate coated with COLORBOND® steel paint system will deliver enduring corrosion resistance and longer life. Up to 13 colors available in the Tuff Rib or Diamond Rib profile offering years of warranted protection. thicker steel create a stronger, more durable panel.

Advantages of COLORBOND® steel

- Chalk and fade resistance
- Greater snow and wind yields and hail resistance Highly
- resistant to UV rays, acid rain, salt spray, and abrasion

UL Ratings


- UL construction No# 560 UPLIFT TEST
- UL 2218 Class 4 IMPACT RESISTANCE
- UL 790 Class A FIRE RESISTANCE

Roofing and Siding Applications

- Agricultural
- Architectural
- Commercial
- Industrial
- Residential

Standard Specifications

- 28-gauge (.0155) Structural Steel Grade 80 produced in conformance with ASTM792 COATING - 47% to 57% aluminum, 1% to 3% magnesium, 1% to 2% silicon with the remainder zinc
- 95,000 PSI minimum yield
- AM® substrate
- Tuff Rib panel 3/4" major rib height; 1/8" minor rib height 36" cover width
- Diamond Rib panel 5/8" major rib height; 36"
- Custom cut to the inch up to 40' feet
- Available in a wide variety of colors
- 3:12 recommended minimum roof pitch
- 50-year non-prorated warranty
- 25-year perforation warranty
- 10-year edge rust warranty
- Cut panels coated with CECI™

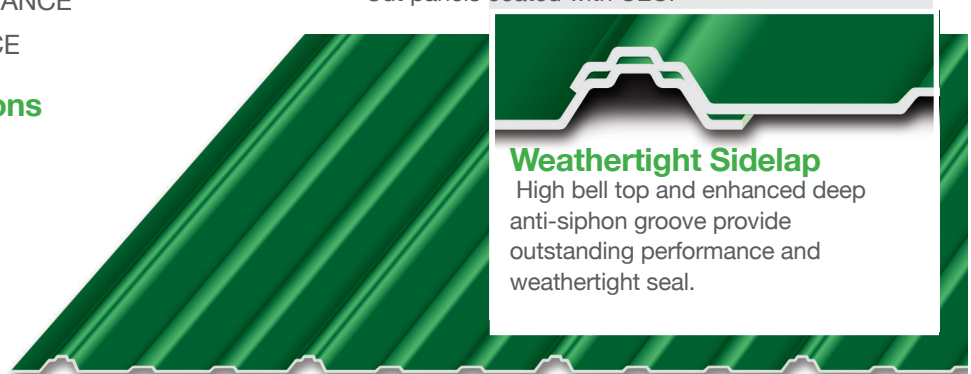

Weathertight Sidelap

High bell top and enhanced deep anti-siphon groove provide outstanding performance and weathertight seal.

